
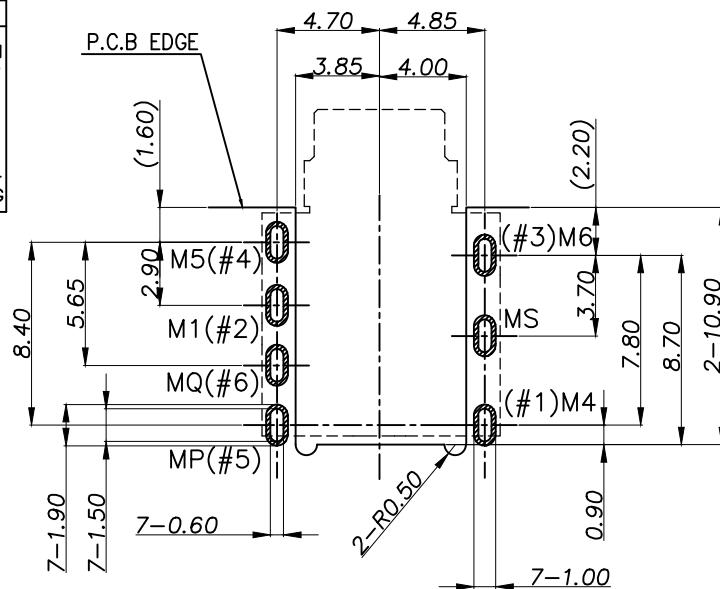


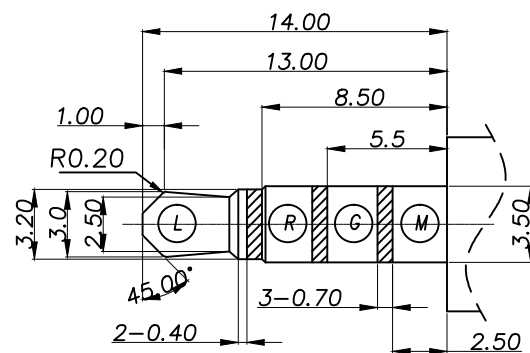
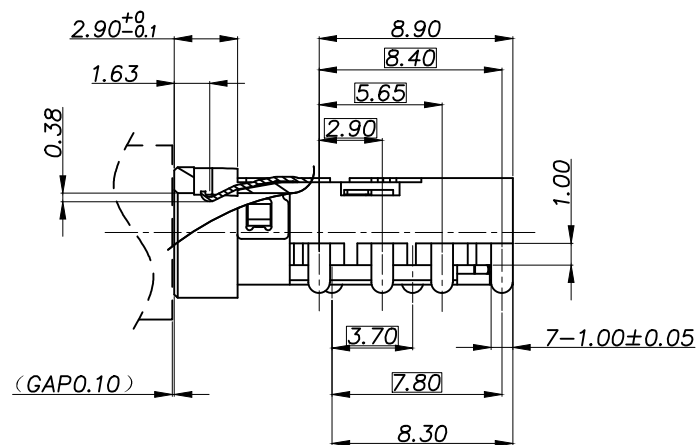
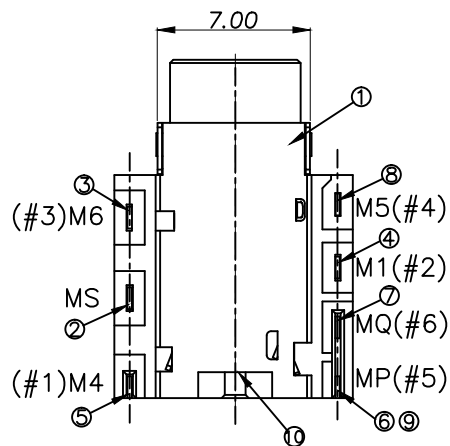
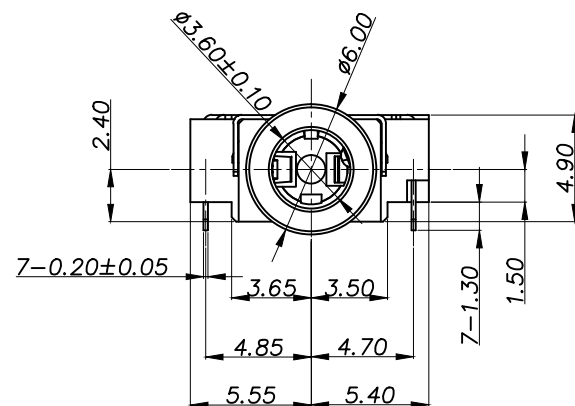


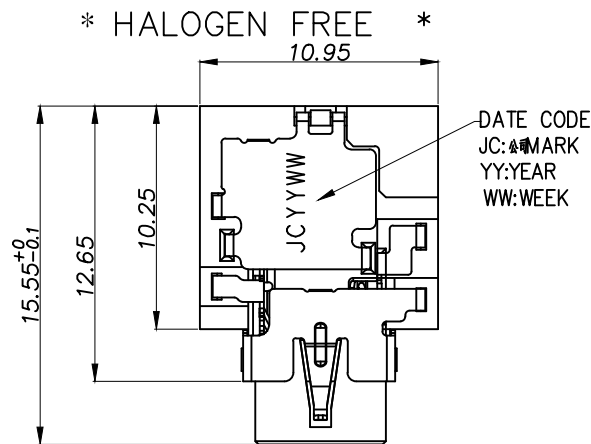

RECOMMENDED PADS LAYOUT
<TOP VIEW>

NOTE : TOLERANCE FOR PCB LAYOUT IS ± 0.05

⑩	DUMMY PIN	SUS304	—	1	0.15t
⑨	SEPARATOR	PA9T	UL94V-0	1	BLACK
⑧	M5_CONTACT	C5210R-EH	Overall nickel plating 50u' MIN , CONTACT AREA GOLD FLASH.	1	0.2t
⑦	MQ_SHUNT	C5210R-EH		1	0.2t
⑥	MP_CONTACT	C5210R-EH		1	0.2t
⑤	M4_CONTACT	C5210R-EH		1	0.2t
④	M1_CONTACT	C5210R-EH	Ni 50u' MIN	1	0.2t
③	M6_CONTACT	C5210R-EH		1	0.2t
②	MS_SHELL	C5210R-EH	UL94V-0	1	0.2t
①	P1_HOUSING	PA9T	UL94V-0	1	BLACK
ITEM	DESCRIPTIONs	MATERIAL	FINISH	Q'TY	NOTE

DWN	LILY	DATE	2018.09.18	3RD ANGLE PROJECTION	NAME
CHKD	ANDY	DATE	2018.09.18		3.5mm EARPHONE JACK
APVD	JON	DATE	2018.09.18	UNIT: mm	CAT. NO.
JKCR Electronics Co., Ltd.					PJD-035-202AGF
					DWN.NO.
					E-035-202
					001

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3